


SOLAR'S MOST TRUSTED



# REC ALPHA<sup>®</sup> PURE-RX

## DATASHEET

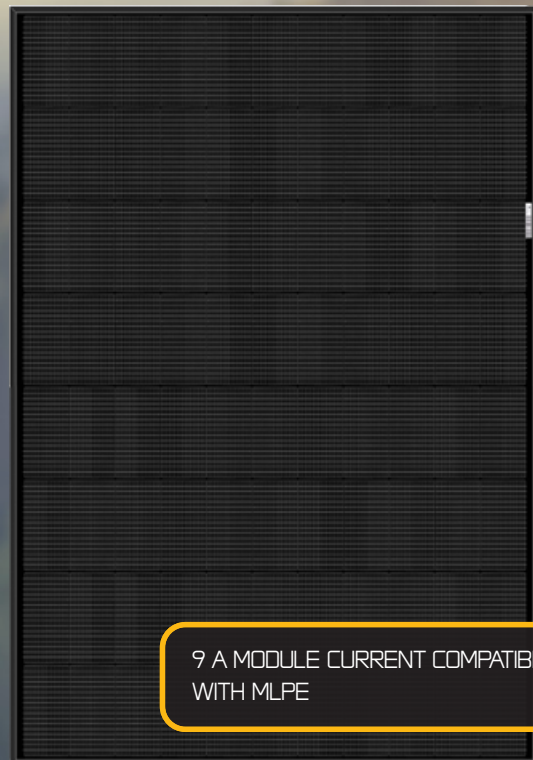

9 A MODULE CURRENT COMPATIBLE  
WITH MLPE

450 - 470W  
HETEROJUNCTION  
TECHNOLOGY

22.6% MAX EFFICIENCY  
>92% POWER IN YEAR 25  
-0.24%/°C TEMPERATURE  
COEFFICIENT OF P<sub>MAX</sub>




ELIGIBLE

# REC ALPHA® PURE-RX DATASHEET

## GENERAL DATA

Cell Type	88 half-cut bifacial REC heterojunction cells, with gapless technology
Glass	0.13 in solar glass with anti-reflective surface treatment in accordance with EN12150
Backsheet	Highly resistant polymer (Black)
Frame	Anodized aluminum (Black)
Junction Box	4-part, 4 bypass diodes, IP68 rated, in accordance with IEC 62790:2020
Connectors	Stäubli MC4 PV-KBT4/KST4 (12 AWG) in accordance with IEC 62852:2014, IP68 only when connected
Cable	12 AWG solar cable, 59.1 in (1.50 m) + 59.1 in (1.50 m) in accordance with EN50618:2014
Dimensions	68.0 x 47.4 x 1.2 in (22.4 ft²) / 1728 x 1205 x 30 mm (2.08 m²)
Weight	50.0 lb / 22.7 kg
Origin	Made in Singapore

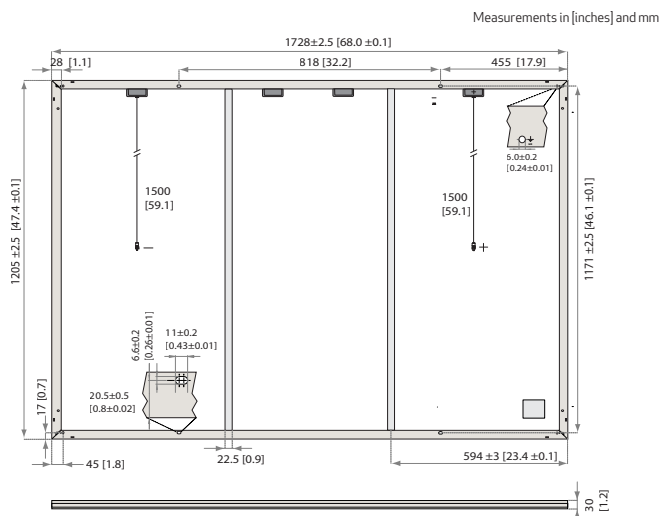

Specifications subject to change without notice.

## ELECTRICAL DATA

PRODUCT CODE\*: RECXXXAA PURE-RX

Power Output - P <sub>MAX</sub> (W <sub>p</sub> )	450	460	470
Watt Class Sorting - (W)	0/+10	0/+10	0/+10
Nominal Power Voltage - V <sub>MPP</sub> (V)	54.3	54.9	55.4
Nominal Power Current - I <sub>MPP</sub> (A)	8.29	8.38	8.49
Open Circuit Voltage - V <sub>OC</sub> (V)	65.6	65.8	65.9
Short Circuit Current - I <sub>SC</sub> (A)	8.81	8.88	8.95
Power Density (W/ft²)	20.1	20.5	21.0
Panel Efficiency (%)	21.6	22.1	22.6

Power Output - P <sub>MAX</sub> (W <sub>p</sub> )	343	350	358
Nominal Power Voltage - V <sub>MPP</sub> (V)	51.2	51.7	52.2
Nominal Power Current - I <sub>MPP</sub> (A)	6.70	6.77	6.86
Open Circuit Voltage - V <sub>OC</sub> (V)	61.8	62.0	62.1
Short Circuit Current - I <sub>SC</sub> (A)	7.11	7.17	7.23

Values at standard test conditions (STC: air mass AM 1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of P<sub>MAX</sub>, V<sub>OC</sub> & I<sub>SC</sub> ±3% within one watt class. Nominal module operating temperature (NMOT: air mass AM 1.5, irradiance 800 W/m², temperature 20°C, windspeed 1 m/s). \*Where xxx indicates the nominal power class (P<sub>MAX</sub>) at STC above.

## TEMPERATURE COEFFICIENT\*

P <sub>MAX</sub> -0.24%/°C	V <sub>OC</sub> -0.24%/°C	I <sub>SC</sub> 0.04%/°C	*The temperature coefficients stated are linear values
----------------------------	---------------------------	--------------------------	--

## MODULE RATINGS

Module Operating Temperature [T98]§	176°F (80°C)
Min Environmental Temperature	-40°F (-40°C)
Nominal Module Operating Temperature	44 ± 2°C
Max Hail Rating <sup>a</sup>	45 mm @ 30.5 m/s
System Voltage	1000 V
Max Series Fuse Rating	25 A
Max Reverse Current	25 A

§ 98th percentile operating temperature  
\*Based on third party testing

## MAXIMUM TEST LOAD\*

Front (4-Point)*	+7000 Pa (146 lbs/ft²)
Rear (4-Point)*	-4000 Pa (84 lbs/ft²)
Front (6-Point)**	+8000 Pa (167 lbs/ft²)
Rear (6-Point)**	-6000 Pa (125 lbs/ft²)
Design load = Test load / 1.5 (safety factor)	

\*IEC61730/UL61730 certified. Refer to installation manual.  
\*\*Internal testing. Refer to installation manual.

## CERTIFICATIONS

ISO 14001; ISO 9001; IEC45001; IEC62941  
IEC 61215:2021; IEC 61730:2023; UL 61730  
ISO 11925-2 Ignitability (EN 13501-1 Class E)  
IEC 62716 Ammonia Resistance  
IEC 61701 Salt Mist (SM6)  
IEC 61215:2016 Hailstone (35mm)  
UL 61730 Fire Type 2  
IEC TS 63126 Level I



**takeaway**  
for an easy way  
Take-away  
WEEE-compliant  
scheme

## WARRANTY

	Standard	REC ProTrust	
Installed by an REC	No	Yes	Yes
Certified Professional			
System Size	All	<25 kW	25-500 kW
Product Warranty (yrs)	20	25	25
Power Warranty (yrs)	25	25	25
Labor Warranty (yrs)	0	25	10
Power in Year 1	98%	98%	98%
Annual Degradation	0.25%	0.25%	0.25%
Power in Year 25	92%	92%	92%


REC ProTrust Warranty applies only for i) REC panels installed by an REC Certified Solar Professional, and ii) panels have been registered by the installer with REC. Subject to System Size and further conditions. See [www.recgroup.com](http://www.recgroup.com) for details.

## DELIVERY INFORMATION

Panels per Pallet	33
Panels per 40 ft GP/high cube container	594 (18 Pallets)
Panels per 53 ft truck	792 (24 Pallets)

## LOW LIGHT BEHAVIOR

Typical low irradiance performance of module at STC:

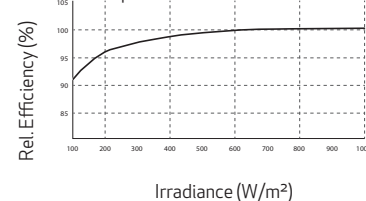

Available from:

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

**REC Solar PTE. LTD.**  
20 Tuas South Ave. 14  
Singapore 637312  
[post@recgroup.com](mailto:post@recgroup.com)  
[www.recgroup.com](http://www.recgroup.com)